VIGO Gramercy Pull-Down Kitchen Faucet VG02008

PRODUCT FEATURES

- 360° swivel spout
- 1.8 gpm flow rate
- · Single-hole installation
- Designed in NYC
- Water pressure tested for industry standard
- · Sedal ceramic disc cartridge tested for 500,000 uses
- Nylon braided pull-down hose extends up to 30 inches
- Thermostable, this faucet is freeze-resistant and pressure resistant up to 362.5 PSI
- · Spray face resists mineral buildup and easy to clean
- · All mounting hardware and hot/cold waterlines included
- Dual action, pull-down spray head for aerated flow or powerful spray
- All VIGO products are plated in the same facility to ensure consistency in color and finish
- Solid brass construction with premium chrome finish
- Smart handle design moves 90° forward to allow for tighter spaces and delicate backsplashes
- · VIGO finishes resist corrosion and tarnishing, exceeding industry durability standards

CODES / STANDARDS











- CEC (Title 20) flow rate compliant (A 1.8GPM flow rate stays within the CEC (Title 20) compliancy.)
- cUPC, NSF-61, NSF-372, CALGreen and AB1953 certified by IAPMO
- ADA compliant
- All VIGO Kitchen Faucets have a Limited Lifetime Warranty

PACKING LIST

- Faucet Assembly
- Sprayer
- Allen Key
- Two Metal Braided
- Counterweight
- Plastic Holder

MATERIAL

- Housing material: Brass
- · Valve material: Ceramic
- VIGO 7-layer coated finish resists corrosion and tarnish, maintaining a pristine look for years to come.




^{**}Color swatches intended for reference only.



SWIVEL 360°

VIGO Gramercy Pull-Down Kitchen Faucet VG02008

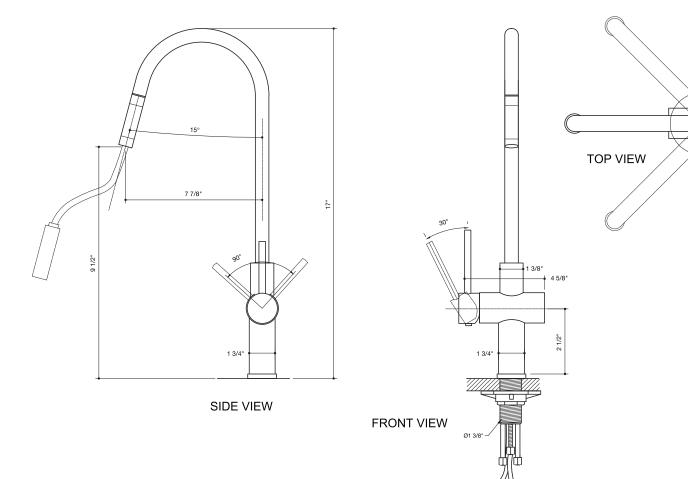

DIMENSIONS						
Faucet height	17"	Pressure	60 psi			
Spout reach	7 1/8"	Spout Type	Pull-down			
Spout swivel	360°	Spray mode	Spray & Stream			
Flow rate	1.8 gal/min	Water supply connection	Standard US plumbing 3/8" connections			
Valve body	Brass	Installation compatability	1-, 2-, 3- and 4-hole sink			

- 0 -		

For installation help, missing or replacement parts, please contact our product spealist for consultation.



+1 866-591-7792 (Option 2) (8:30am - 5:30pm EST)



techmail@vigoindustries.com

NOTE

Install this product according to the installation instructions.

VIGO reserves the right to make revisions without prior notice.

For the most updated specifications, please go to:

www.vigoindustries.com

or email us at:

support@vigoindustries.com

CONNECT WITH US









vigoindustries