


VIGO Hart Single-Action Pull-Down Kitchen Faucet

VG02034

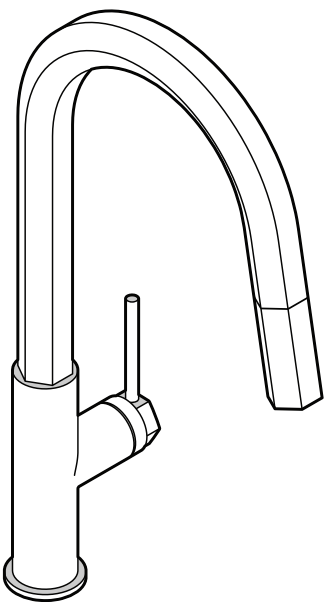

PRODUCT FEATURES
• 360° swivel spout • 1.8 gpm flow rate • Single-hole installation • Designed in NYC • Water pressure tested for industry standard • Sedal ceramic disc cartridge tested for 500,000 uses • Nylon braided pull-down hose extends up to 30 inches • Thermostable, this faucet is freeze-resistant and pressure resistant up to 362.5 PSI • Spray face resists mineral buildup and easy to clean • All mounting hardware and hot/cold waterlines included • Dual action, pull-down spray head for aerated flow or powerful spray • All VIGO products are plated in the same facility to ensure consistency in color and finish • Solid brass construction with premium chrome finish • Smart handle design moves 90° forward to allow for tighter spaces and delicate backsplashes • VIGO finishes resist corrosion and tarnishing, exceeding industry durability standards

CODES / STANDARDS
 LEAD FREE NSF/ABSI 61 UPC C  WaterSense Meets EPA Criteria Certified by IAPMO R&T  STATE OF CALIFORNIA ENERGY COMMISSION  ADA COMPLIANT  VIGO LIMITED LIFETIME WARRANTY • CEC (Title 20) flow rate compliant (A 1.8GPM flow rate stays within the CEC (Title 20) compliancy.) • cUPC, NSF-61, NSF-372, CALGreen and AB1953 certified by IAPMO • ADA compliant • All VIGO Kitchen Faucets have a Limited Lifetime Warranty*


PACKING LIST
• Faucet Assembly • Sprayer • Allen Key • Two Metal Braided • Counterweight • Plastic Holder

MATERIAL
• Housing material: Brass • Valve material: Ceramic • VIGO 7-layer coated finish resists corrosion and tarnish, maintaining a pristine look for years to come.

* See website for detailed warranty information.
**Color swatches intended for reference only.

VIGO Hart Single-Action Pull-Down Kitchen Faucet

VG02034

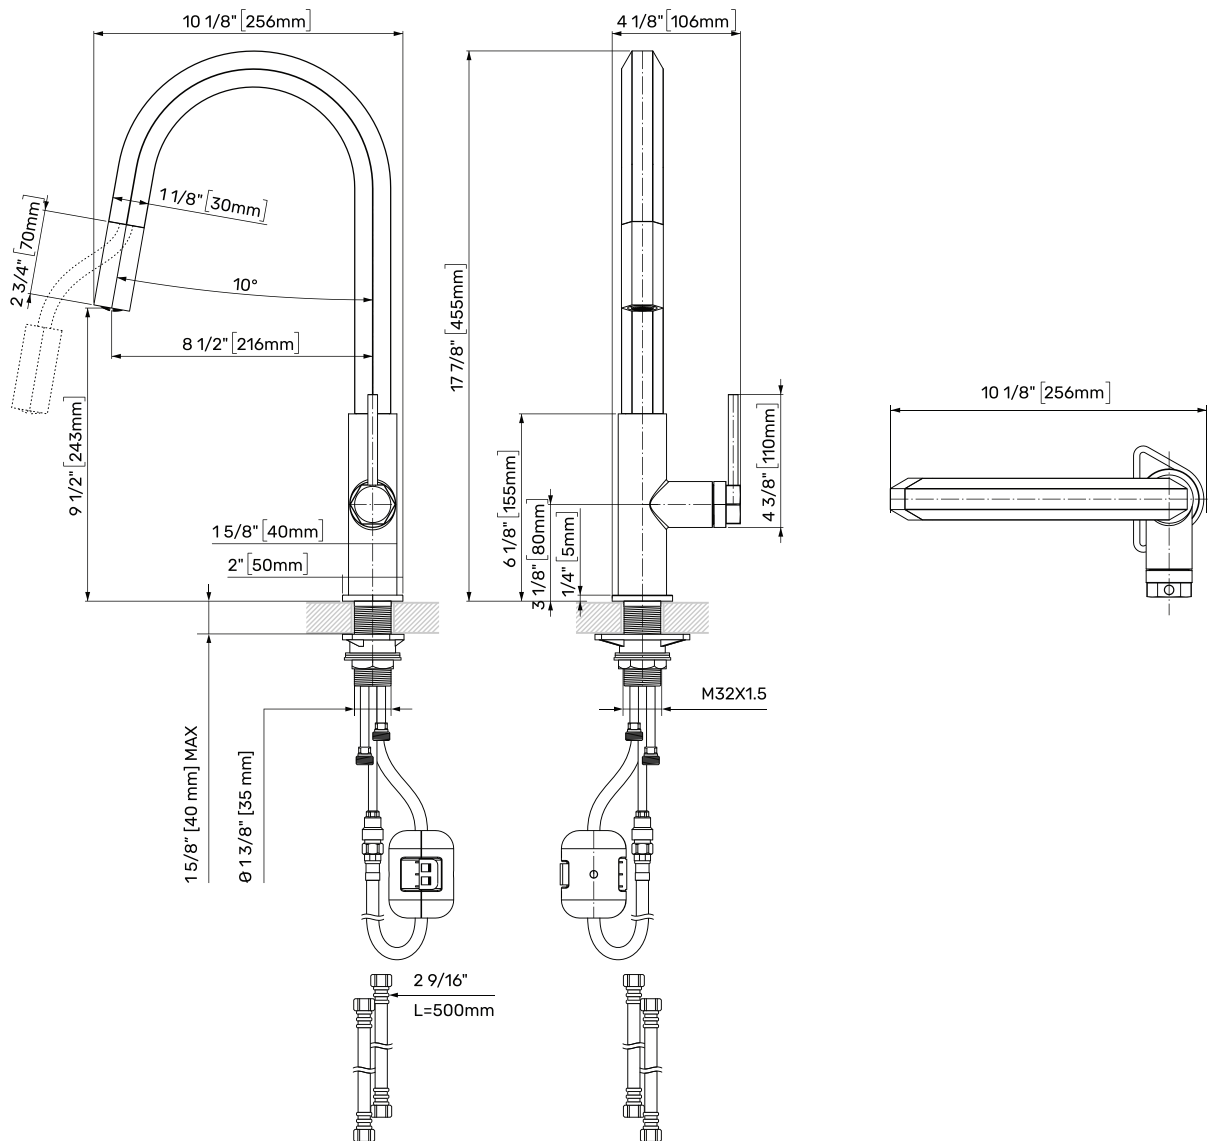

DIMENSIONS

Faucet height	$17 \frac{7}{8}"$ (455mm)	Pressure	60 psi
Spout reach	$8 \frac{1}{2}"$ (216mm)	Spout Type	Pull-down
Hose length	30"	Spray mode	Spray & Stream
Spout swivel	360°	Water supply connection	Standard US plumbing $\frac{3}{8}"$ connections
Flow rate	1.8 gal/min	Installation compatibility	1-, 2-, 3- and 4-hole sink
Valve body	Brass		

NOTE

Install this product according to the installation instructions.

VIGO reserves the right to make revisions without prior notice.

For the most updated specifications, please go to:

www.vigoindustries.com

or email us at:

support@vigoindustries.com

QUESTIONS?

For installation help, missing or replacement parts, please contact our product specialist for consultation.

+1 866-591-7792 (Option 2) (9:30am - 5:30pm EST)

techmail@vigoindustries.com

CONNECT WITH US



[vigoindustries](http://vigoindustries.com)